


DROPOUT CUTOUT INSULATORS

Outdoor Type

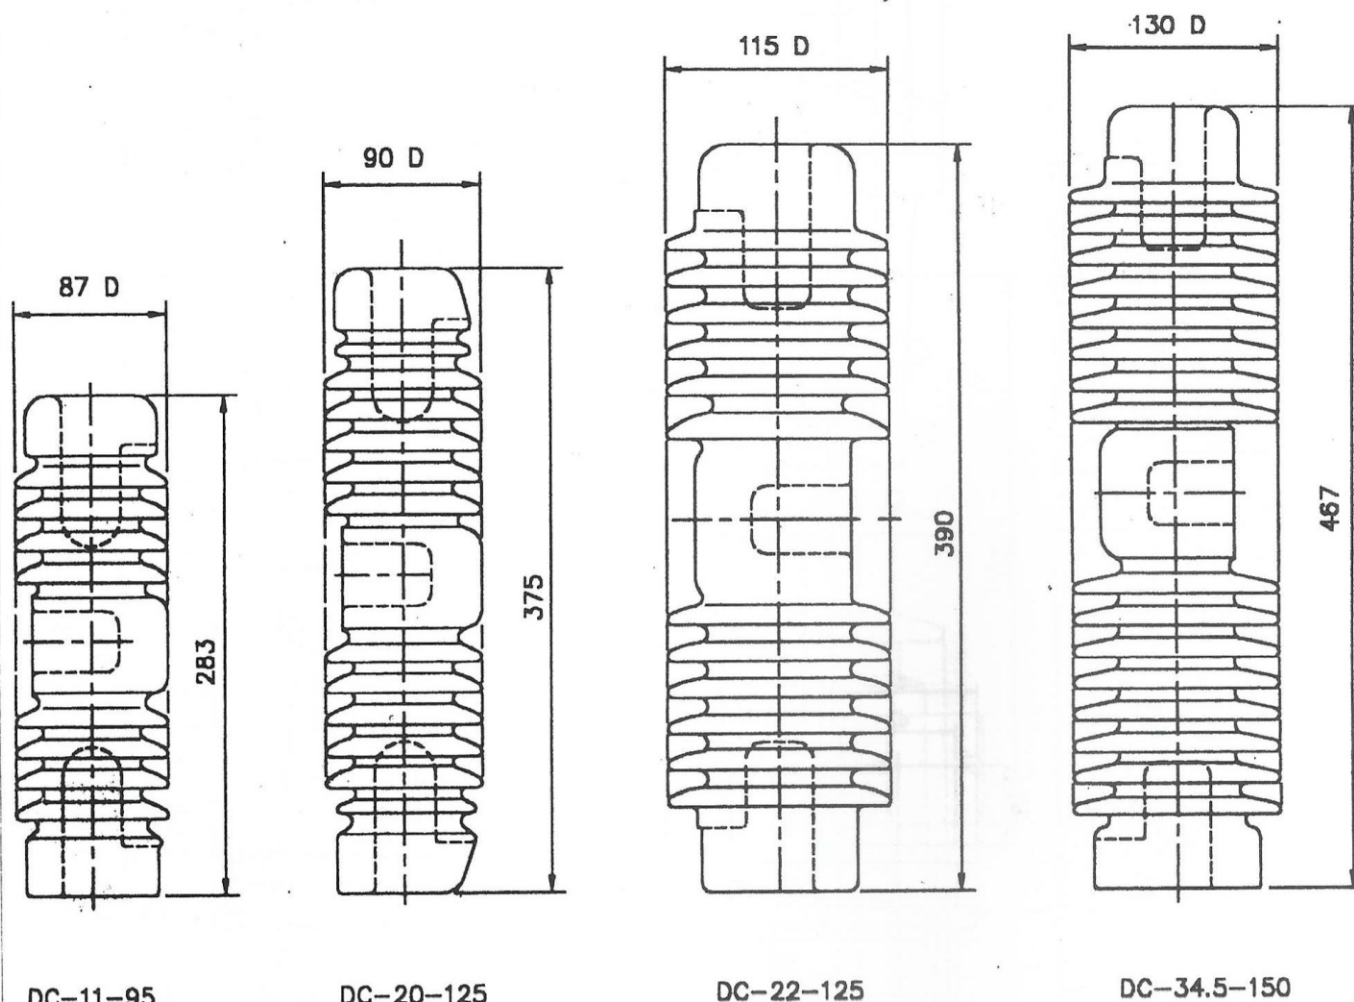

STANDARD PARTICULARS

Catalogue. No.		DC 11 - 95	DC 20 - 125	DC - 22 - 125	DC 34.5 - 150
Voltage Rating Nominal	kV	12.5	24	25	34.5
Leakage Distance	mm	220	280	400	650
Dry Arcing Distance	mm	120	----	----	200
Mechanical Strength (Bending)	kN	20	----	----	20
Power Frequency Withstand Voltage To Ground	Dry	kV	35	42	55
	Wet	kV	30	36	40
Impulse Withstand	kV	95	125	125	150
Weight Per Piece	kg	2.75	3.50	5.00	7.25